




Dimensions Range: V100Q HD

shaft end acc. to DIN748
keyway and key acc. to
DIN6885 sheet 1

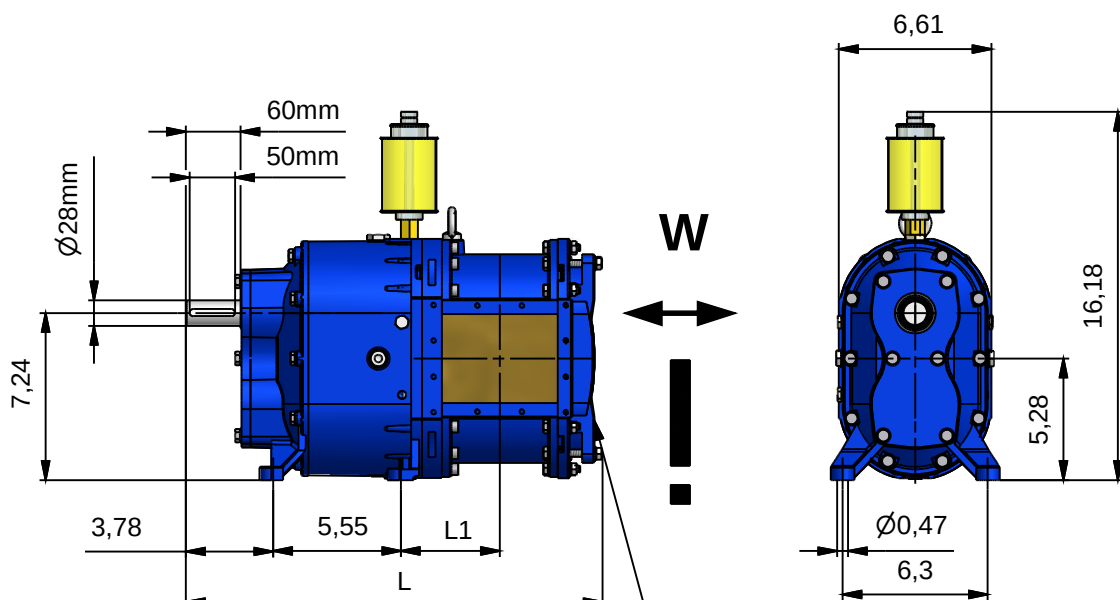

Attention

space required for maintenance work
W = 30 inches min., 40 inches recommended

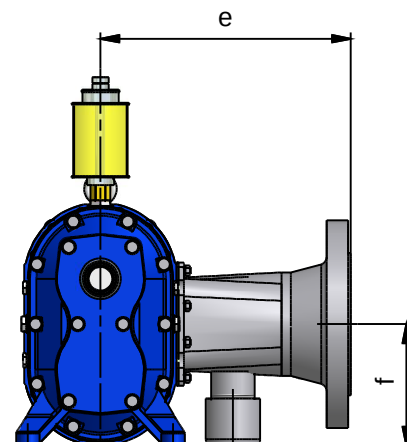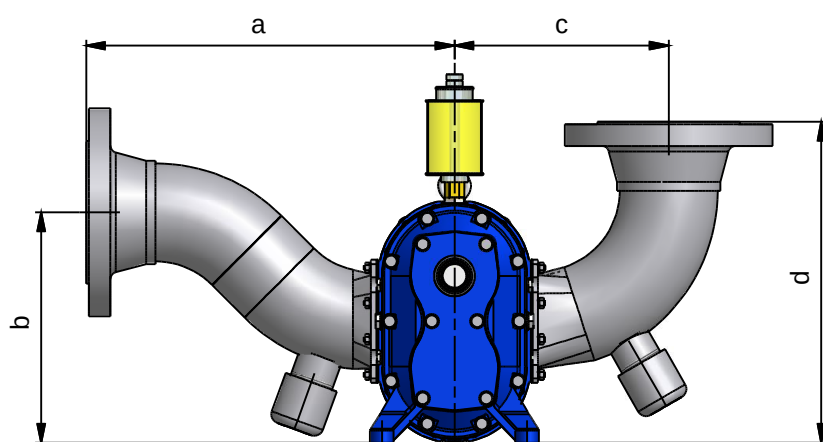


(not recommended)

size V100-	pump dimensions		ANSI-flange					gooseneck		90°elbow		straight		weight (lb)	
	L1	L	DN	d	D	k	n	a	b	c	d	e	f	1)	2)
45Q HD	2,68"	14,88"	2,5"	0,75"	7"	5,5"	4	12,95"	8,82"	9,21"	13,94"	10,79"	5,28"	105	125
64Q HD	3,05"	15,63"	3"		7,5"	6"	4	14,53"	8,82"					110	135
90Q HD	3,56"	16,65"	4"		9"	7,5"	8	15,91"	10"					115	155
128Q HD	4,31"	18,15"												120	165

1) weight: pump without pipe connections

2) weight: pump with gooseneck pipe connections

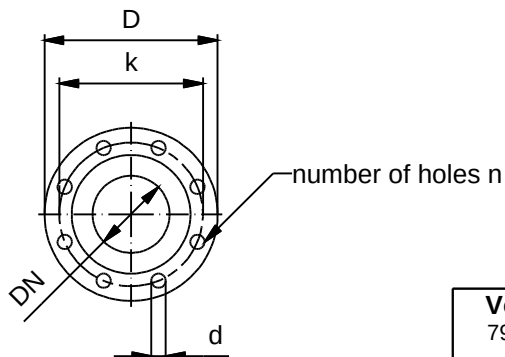

connectors					
size V100-	gooseneck		90°elbow		straight
	article-no	pcs.	article-no	pcs.	article-no
45Q HD	GPA.360		GPA.350		GPA.370
64Q HD	GPA.361		GPA.351		GPA.371
90Q HD	GPA.362		GPA.352		GPA.372
128Q HD	GPA.363		GPA.353		GPA.373

changes of dimensions reserved
dimensions without indication
of tolerances acc. to DIN ISO 2768, rough

Vogelsang USA
7966 State Route 44
P. O. Box 751
Ravenna, OH 44266 USA

© Copyright

dimensions shown in inches
fabrication tolerance is ± .12"

VOGELSANG

Drawing No.: IZ0400948

R:1

Drawn By: Lohrey
checked By:

Date: 06.04.2004
Date: